


# HSF

**NOTES:**


Current Rating: 3.0AMP  
 Voltage Rating: 250V AC,DC  
 Contact Resistance: 20m  $\Omega$  Max  
 Withstand Voltage: 800V AC/DC  
 Insulation Resistance: 1000M  $\Omega$  Min  
 Operation Temperature: -25 °C to +85 °C  
 Insulator Material: PA66 (UL94V-0)  
 Use with: WF2503-T  
 Mated With: WF2503-Wafer

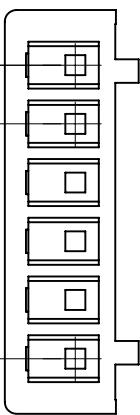

## Ordering Information

WF2503-H XX X 0 1

No. of Pins 02P-25P  
 Color W= White  
 B= Black  
 U= Blue  
 E= Beige  
 Packing 0=PE Bag

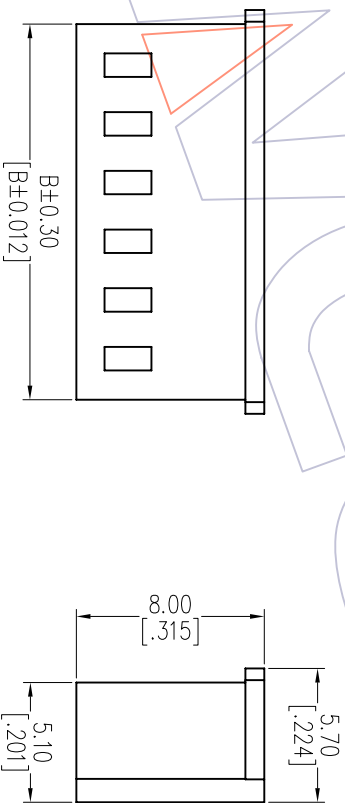

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF2503-H02X01	2.50	6.00	1,000
03	WF2503-H03X01	5.00	8.50	1,000
04	WF2503-H04X01	7.50	11.00	1,000
05	WF2503-H05X01	10.00	13.50	1,000
06	WF2503-H06X01	12.50	16.00	1,000
07	WF2503-H07X01	15.00	18.50	1,000
08	WF2503-H08X01	17.50	21.00	1,000
09	WF2503-H09X01	20.00	23.50	1,000
10	WF2503-H10X01	22.50	26.00	1,000
11	WF2503-H11X01	25.00	28.50	1,000
12	WF2503-H12X01	27.50	31.00	1,000
13	WF2503-H13X01	30.00	33.50	1,000
14	WF2503-H14X01	32.50	36.00	1,000
15	WF2503-H15X01	35.00	38.50	1,000

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION XX ±0.40	DRAW JYHuang	DATE 2012/09/05	SCALE UNIT mm	FIT 1/1	PART NO. SEE TAB
AO	2012/09/05	NEW	—	X.XX ±0.25	CHECK	DATE	SIZE A4	SHEET 1/1	TITLE: "M"TYPE 2.50 HOUSING
				X.XXX ±0.15	APPROVE				Customer NO.
				Angle ± 3'					

# WCON

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com