
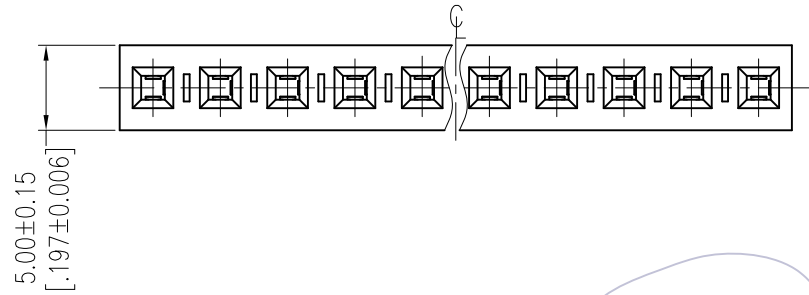


HSF

NOTES:
 Current Rating: 7.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

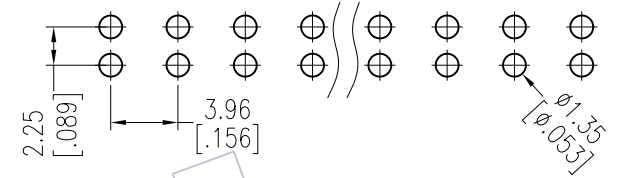



Ordering Information

2889 - 1 XX S XX DUNT 1

No. of Pins per ROW: 02-20PIN
 A1

SN=Tin
 SM=Matte Tin

Packing:
 T=Tube

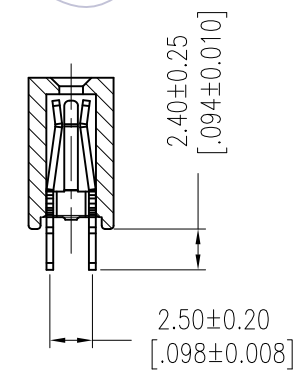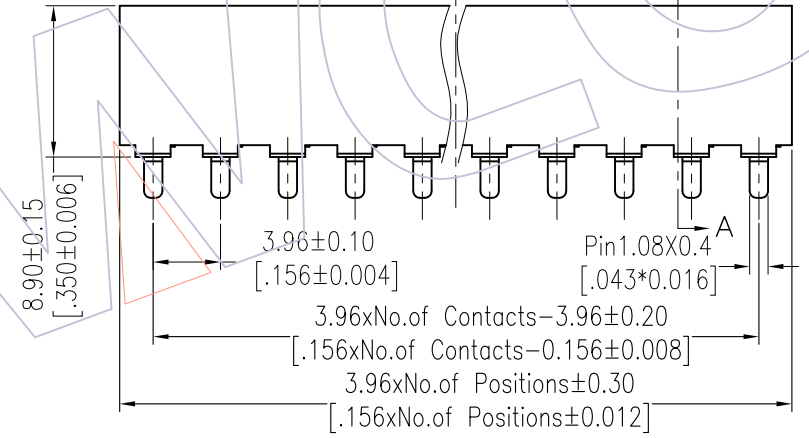

Item	Pitch	Mating
Standard	3.96	1832
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2017/06/08	MODIFY	-----	x.x ±0.40	Surong Xu	2017/06/08	UNIT	mm	2889-1XXSXXDUNT1
AO	2012/08/18	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH3.96 SINGLE ROW 180°DIP H=8.9
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com