

HSF

NOTES:
 Current Rating:2.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C





Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%GF(UL94V-0)
 CAP Material:LCP+30%G.F(UL94V-0)

Ordering Information

3121-XX M XX B K00 X X

No. of Pins	Contact Plating	Color Insulator	Packing	Series No.
14 30	G0=Gold Flash	B=Black	T=Tube	1=Type 1
16 34	G3=10u"Gold		P=Tube+CAP	2=Type 2
20 40	G4=15u"Gold		R=Tape&REEL+CAP	
24 44	G5=30u"Gold			
26 50	S0=Gold Flash/Tin			
	S3=10u"Gold/Tin			
	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			

Item	Pitch	Mating
Standard	2.00	5223/5226
Alternate		

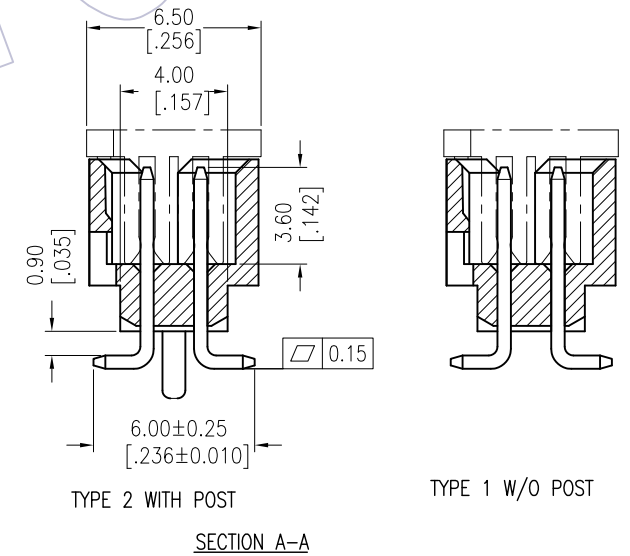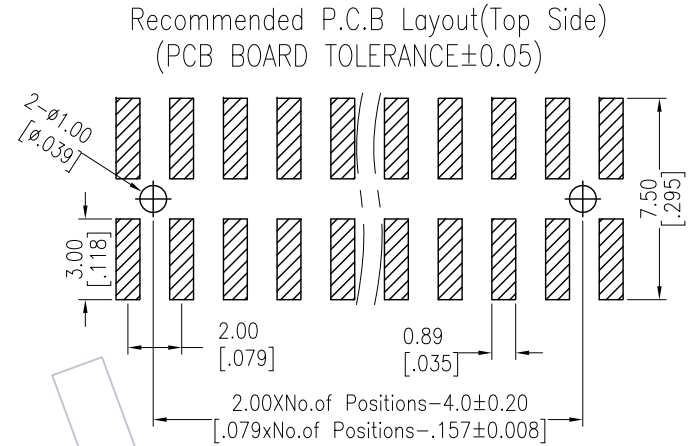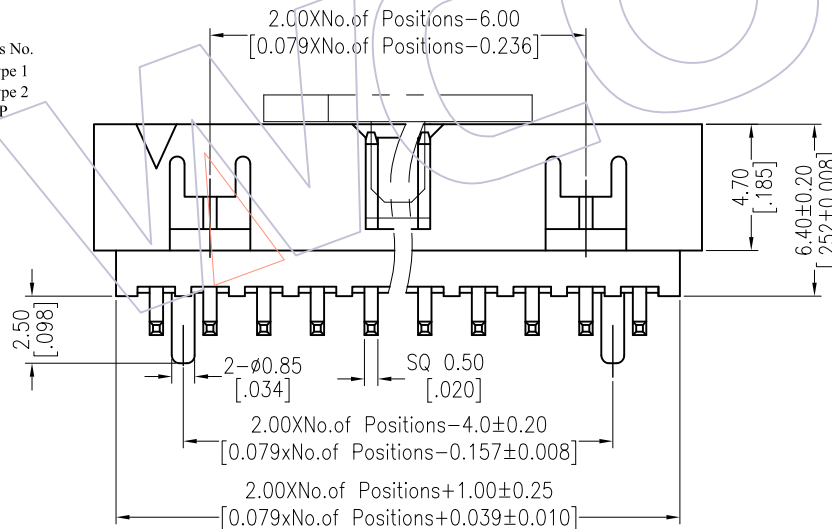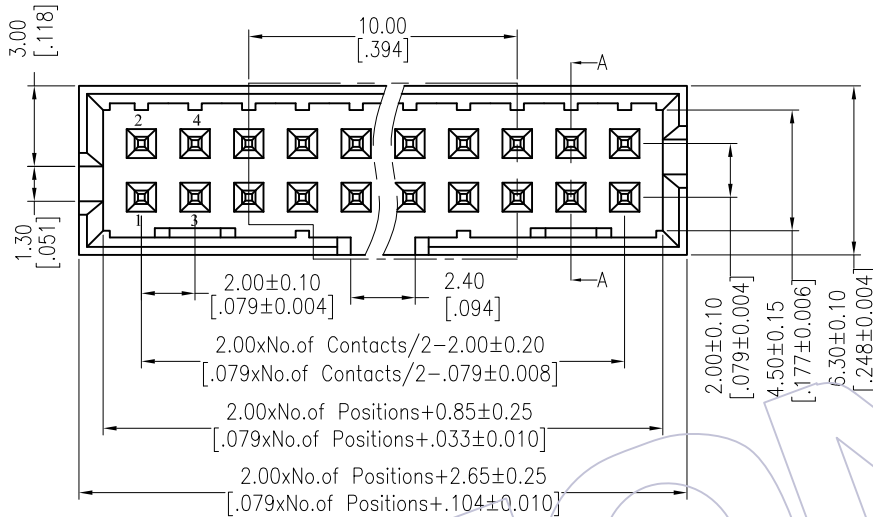

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
A1	2015/08/27	Modify	△	x.x	±0.40	Allen	2015/08/27	UNIT	mm	3121-XXMXXBK00XX
A0	2012/09/24	NEW	—	x.xx	±0.25	CHECK	DATE	SIZE	A4	
				x.xxx	±0.15	APPROVE	DATE	SHEET	1/1	TITLE:
				Angle	± 3'			PROJ.	⊕	2.00 BOX HEADER SMT H=6.4
				DIM	TOL					Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com